

AERODROME CHART - ICAO

ELEVATION 21 M
02° 44 ' 36" N
101° 41 ' 53" E

RWY 15/33		RWY 14R/32L		RWY 14L/32R		APRON WEST		APRON EAST	
TWR	119.800	TWR	118.500	TWR	118.800	121.725	122.150	122.150	122.150
GND	118.050	GND	121.800	GND	121.650	122.550	122.850	122.275	123.250
		GND	122.525			130.750			

SEPANG/
KL INTERNATIONAL
AIRPORT

ELEVATIONS AND DIMENSIONS IN METERS
BEARINGS ARE MAGNETIC


VAR 0° E 2019

ANNUAL RATE
OF CHANGE 32"E

BEARING STRENGTH

RWY	TWY	APRON	
ALL RWY	RWY 14L/32R AND RWY 14R/32L	RWY 14L/32R AND RWY 14R/32L	KLIA 2
CONC PCN90/R/C/W/T FLEX PCN100/F/C/W/T	ASPHALT PCN100/R/C/W/T	CONC PCN90/R/C/W/T PCN 100 RWY / TWY	WI APRON QUADRANT WTN,WTE, WTS, WTW-1,WSN & WSW ASPHALT PCN 97/F/D/X/T
	WI RWY 14R/32L & RWY 15/33 U1,U2,U3,U4,U8 & U9 ASPHALT PCN 97/F/D/X/T U5,U6 & U7 ASPHALT PCN 114/F/D/X/T		WI APRON QUADRANT WTW-2, WSE & WSS ASPHALT PCN 114/F/D/X/T

RWY	DIRECTION	THRESHOLD
15	146°	02° 44' 17.57 "N 101° 40' 38.97 "E
33	326°	02° 42' 30.67 "N 101° 41' 50.65 "E
14R	146°	02° 44' 35.84 "N 101° 41' 52.63 "E
32L	326°	02° 42' 47.86 "N 101° 43' 05.03 "E
14L	146°	02° 46' 42.52 "N 101° 42' 06.67 "E
32R	326°	02° 44' 54.03 "N 101° 43' 19.41 "E

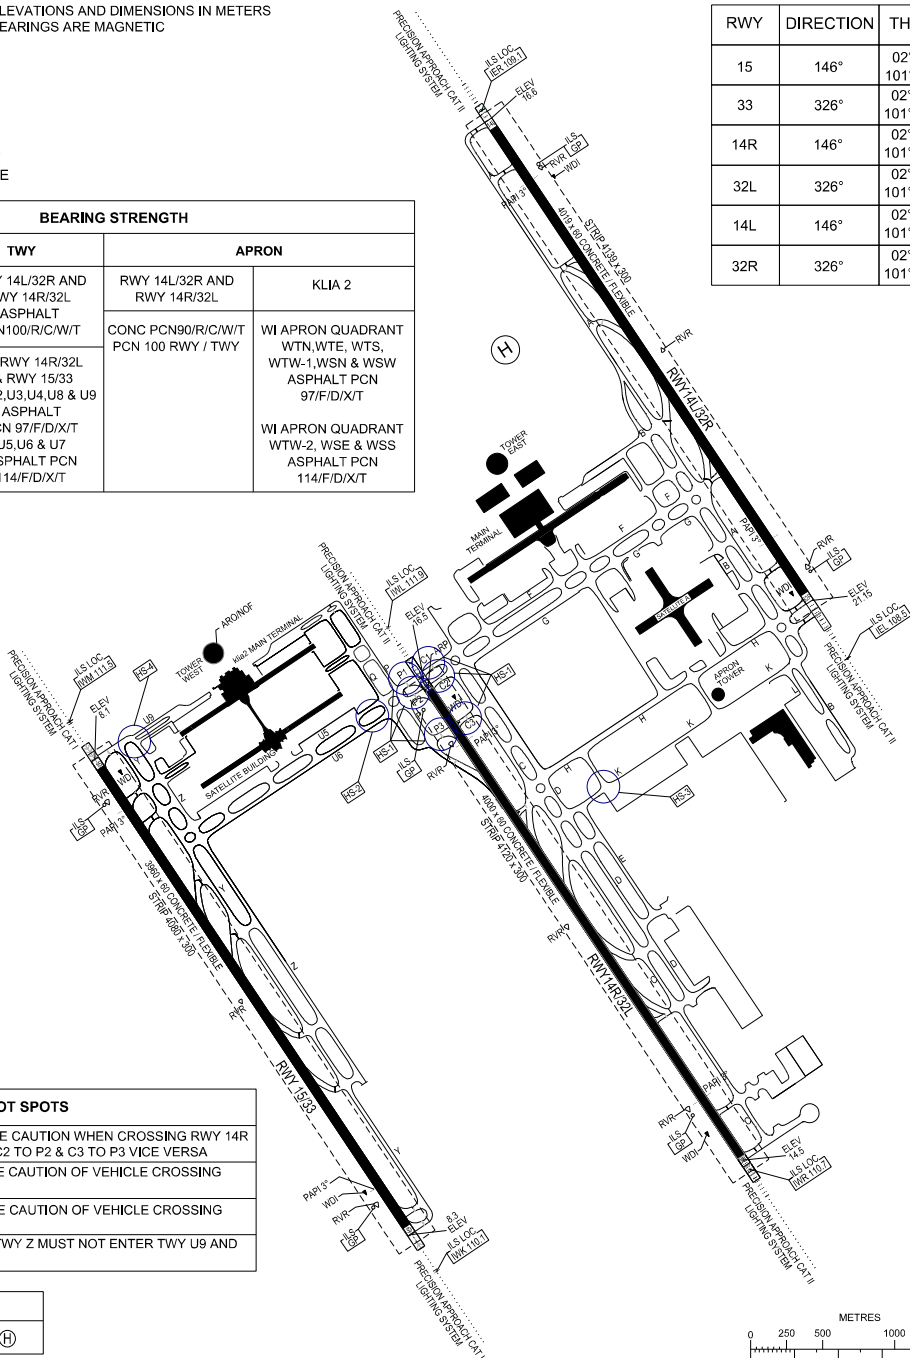

HOT SPOTS

HS 1	PILOTS TO EXERCISE CAUTION WHEN CROSSING RWY 14R VIA TWY C1 TO P1, C2 TO P2 & C3 TO P3 VICE VERSA
HS 2	PILOTS TO EXERCISE CAUTION OF VEHICLE CROSSING TWY U5 & U6
HS 3	PILOTS TO EXERCISE CAUTION OF VEHICLE CROSSING TWY K
HS 4	AIRCRAFT EXITING TWY Z MUST NOT ENTER TWY U9 AND VICE VERSA

LEGEND

HELIPORT



CHANGES : CHANGE AERODROME ELEVATION TO 21 M